



PHANTOM TWIN CELING CUSTOM MOUNT

INSTALLATION

## STEP 1: REMOVE THE CEILING COVER CAP

- 1. Place the Phantom twin mount base on a flat surface as pictured. (Fig. 1)
- 2. Undo the 2 screws on the ceiling cover cap with a 5mm Allen key (Fig.2)
- 3. Remove the ceiling cover cap from the ceiling cover. Note, DO NOT remove the plugs from the ceiling tubes (Fig. 3)

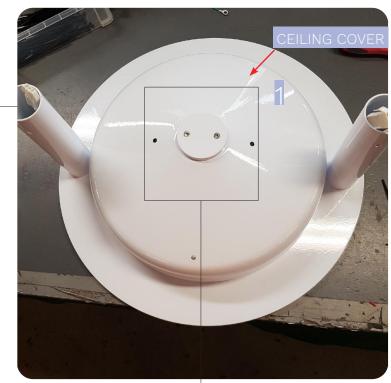


Fig. 1



Fig. 3



Fig. 2 Remove the ceiling cover cap



# STEP 2: REMOVE CEILING COVER

- 1. Gently lift off the ceiling cover and disconnect the 2 x power indicator lights by disconnecting both 2-way plugs (see Fig.4).
- 2. Completely remove (lift off) the ceiling cover and set aside.



Fig. 4 Disconnect the two indicator lights power supply from the ceiling cover.









#### STEP 3: BOLT TO ROOF AND CONNECT MAINS POWER

- 1. Bolt ceiling plate to ceiling using 8 bolts through the bolt holes NOTE! USE OF All 8 BOLTS IS RECOMMENDED.
- Pass mains power through one of the mains pass-through holes (Fig.5.0)
- 3. Connect mains power to mains terminal block (Fig 5.1)

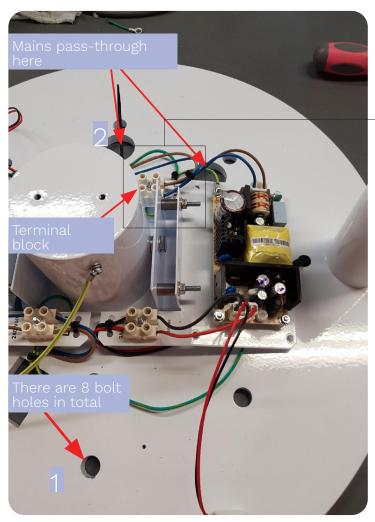


Fig. 5.0



Fig. 5.1 Connect mains power to terminal block.





## STEP 4: REATTACH CEILING COVER TO PLATE

- 1. Reconnect the 2 indicator light 2-way plugs with the ceiling cover. (Fig. 6)
- 2. Place the ceiling cover over the base plate.
- 3. Replace the ceiling cover cap and tighten the 2 x ceiling cover screws to re-secure the ceiling cover to the base (Fig. 7). Note! DO NOT overtighten screws.



Fig. 6 Note! Remember to reconnect both (2) power indicator lights.

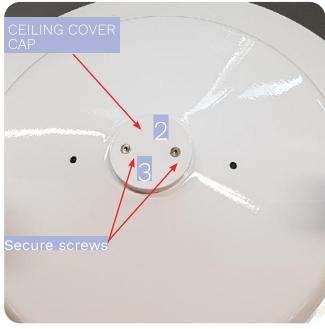


Fig. 7







#### STEP 5: REFER TO PHANTOM INSTALLATION DOCUMENT

1. To continue installation, refer to the existing documentation:

Phantom Installation manual



#### **END OF GUIDE**

Australia.
Exported to



Customer service: + 61 (0)2 6659 5600 Monday - Friday 9am - 5pm

NSW 2454 Australia
Phone + 61 (0)2 6659 5600
Fax + 61 (0)2 66552121
sales@planetlighting.com
planetlighting.com





