

Luxo Retrofit to ULED

CEILING-MOUNTED LIGHT CONVERSION

EXISTING LUXO



ULED RETROFIT



Installation information

Scan the QR code to continue.


Luxo Retro Fit to ULED



PLANET
LIGHTING

RETROFIT GUIDE

Drawings

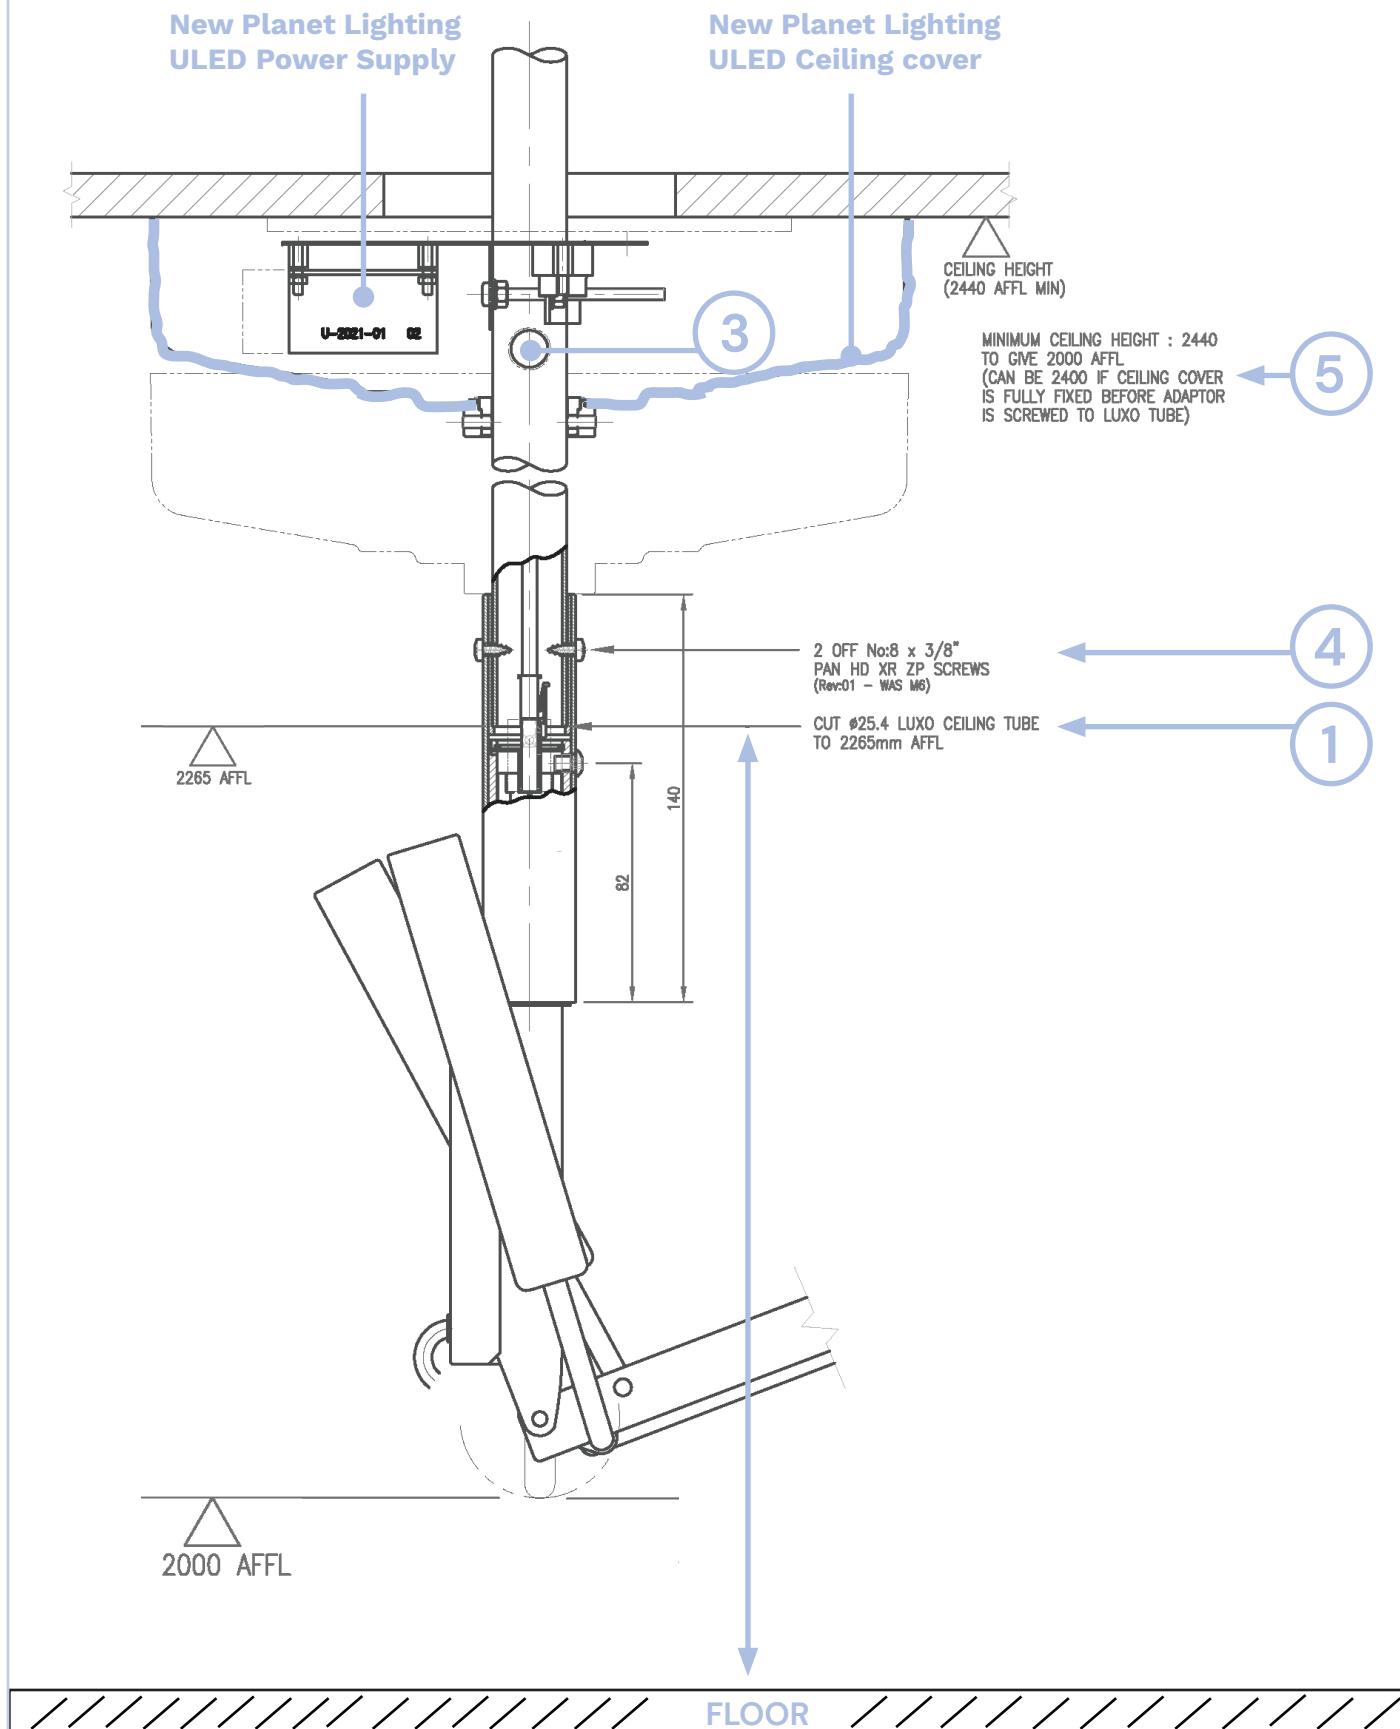

Step-by-step instructions

- ① Existing Ø25.4 Luxo ceiling tubes to be CUT at 2265mm AFFL by installers, ensuring that there is no slot remaining. The cut end will be covered by a Planet Lighting adaptor, which will fit over the existing Luxo ceiling tube. This can be done in-situ, without removing the ceiling mount from its fixings.
- ② Install the ceiling cover before putting the adapter ON.
- ③ A Ø10 wiring hole must be drilled near the ceiling to route 240V wiring into ceiling cover, and also to route ELV wiring from our power supply down to the 3-pin plug at the top of our swivel boss.
- ④ Two Ø4mm holes must be drilled by the installers, using our adaptor as a drilljig. Fix adaptor to Luxo Ceiling Tube with 2 off #8x9.5 XR Pan Head ZP fixing screws supplied by us.
- ⑤ Minimum ceiling height is 2440mm AFFL. With a small degree of difficulty for the installers, this can be reduced to 2400mm AFFL absolute minimum.
- ⑥ Our “Bright White” colour may be an imperfect colour match to the Luxo white.

END OF THE DOCUMENT

