

IP68 STANDARD

LED Puck IP68 is the ideal waterproof handrail lighting solution. Built to last with premium materials and a vandal-resistant construction IP68 can deliver continued photometric excellence even in challenging environmental conditions: including snow and intermittent flooding — and all without sacrificing uniformity or elegance. It's confident lighting for the cold, wet or extreme.

PRODUCT CODE	SPECIFICATION
IP68-ST-CF-30	IP68 Standard Beam Curved Face 3000K
IP68-ST-CF-40	IP68 Standard Beam Curved Face 4000K
IP68-ST-FF-30	IP68 Standard Beam Flat Face 3000K
IP68-ST-FF-40	IP68 Standard Beam Flat Face 4000K



ETLus conforms to UL2108
cETL conforms to CSA C22.2 #250.0
Product Not for Permanent Submersion
Warranty covers submersion up to 2m at 24hrs



OPTIONS

CCT 2700K / 3500K / Custom
Custom Beam Angles
CRI 90+

SPECIFICATIONS

TECHNICAL

1.4W / 500mA / 2.8Vf
3000K - 122lm / 4000K - 130lm
CRI 80+ (CRI 90+ OPTION)
3 STEP MACADAM ELLIPSE
L90 B10 >100,000h

OPTICS

OPTICALLY CLEAR POLYURETHANE

DISTRIBUTION

ELLIPTICAL SYMMETRIC

MATERIAL

316 STAINLESS STEEL
ELECTROPOLISHED

AMBIENT OPERATING CONDITIONS

MIN. -40° / MAX. 55°

PROTECTION CLASS

IK10 / IP68 — RATED TO 2m at 24hrs
(NOT FOR PERMANENT SUBMERSION)

ELECTRICAL

COOLSPICE CONNECTOR

INSTALLATION SURFACE

MIN. 1.5mm WALL THICKNESS
MIN. Ø35mm RAIL (CURVED FACE ONLY)

APERTURE

Ø15mm

COUNTERBORE


(REQUIRED FOR FLUSH FINISH)
Ø16mm x 1.6mm (Curved Face)
Ø16mm x 0.5mm (Flat Face)

CONTROL

1-10V | DALI | DMX | ZIGBEE | CASAMBI
BLUE LIGHT LINK | basicDIM WIRELESS


BEAM AND FACE DETAIL

STANDARD BEAM (FWHM)




Elliptical symmetric distribution for typical mounting at 30° from vertical

CURVED FACE



FLAT FACE




IP68 STANDARD


PHOTOMETRICS

IP68 Standard has an elliptical symmetric distribution. For installation in handrail, mounting is typically at 30° from the vertical axis of the handrail underside. IP68 is available in a range of standard distributions and special angles on request.

STANDARD BEAM 3000K

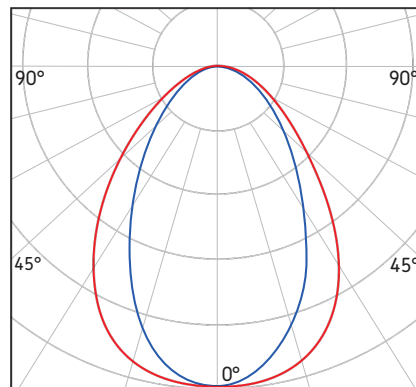


BEAM ALPHA 3000K

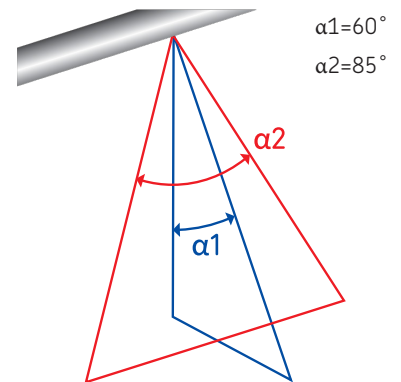

LUX GUIDE

The following guide is intended to help designers and engineers with desired lux levels. The drawing to the right shows a typical installation into a handrail. The tables list the average lux at a variety of path widths and LED spacings.

TYPICAL INSTALLATION

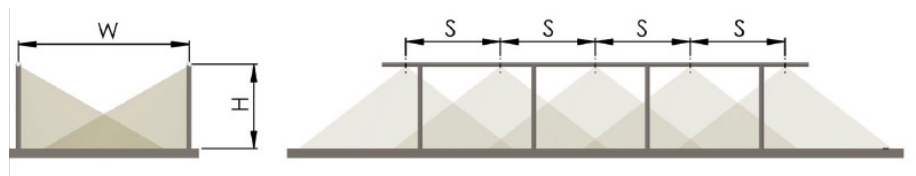

Height (H) is at 1m

STANDARD BEAM: LIGHT FROM BOTH SIDES

Path Width (W)	1.2m	2.0m	3.0m	4.0m
LED Spacing (S)	lx	lx	lx	lx
0.5m	192	115	77	57
1.0m	96	57	38	29
2.0m	48	29	19	14

lx = average lux

CCT = 3000K

Note: Calculations indicated are with LED module installed at 30° offset from vertical down axis.