

DATASHEET

PLANET LED PUCK RGBW WIDE


Let free your imagination with LED Puck RGBW WIDE. Infuse vibrant, emotive colour into any lighting project simply and efficiently. RGBW has a plug and play design and patented collapsible shell module making installation quicker and easier than ever. And with thermal control built-in, installation is possible in a range of material types including metal, wood, plaster and masonry.



PLANET
LIGHTING


RGBW WIDE

5 years warranty is just the beginning. We design and manufacture in our purpose built Australian facility. RGBW WIDE has a 316 stainless steel, vandal resistant body and is impact rated to IK10. Plus, each RGBW WIDE mini puck is individually tested burned in to ensure the light you receive performs as it should.



TYPICAL SPECIFICATIONS

Product Code	Specifications
RGBW-ST-CF-40	RGBW WIDE Beam Curved Face 4000K
RGBW-ST-FF-40	RGBW WIDE Beam Flat Face 4000K

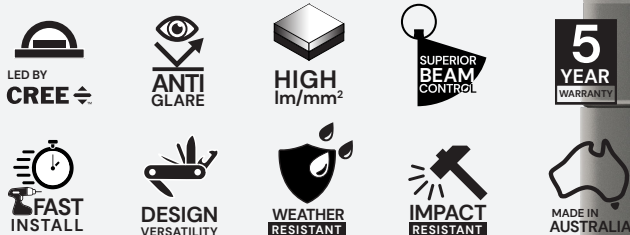

SPECIFICATIONS*

TECHNICAL

1.4W / 500mA (WHITE CHIP) / 2.8Vf
4000K - 180lm
CRI 80+ (CRI 90+ OPTION)
3 STEP MACADAM ELLIPSE
L90 B10 >100,000h

OPTICS

POLYCARBONATE (WIDE)
BOROSILICATE (OPTION)

DISTRIBUTION

ELLIPTICAL SYMMETRIC

MATERIAL

316 STAINLESS STEEL
ELECTROPOLISHED

AMBIENT OPERATING CONDITIONS

min. -40° / max. 55°

PROTECTION CLASS

POLYCARBONATE IP65 / IK10
BOROSILICATE IP67 (OPTION)

ELECTRICAL

COOLSPICE CONNECTOR

INSTALLATION SURFACE

MIN. 1.5mm WALL THICKNESS
MIN. Ø45mm RAIL (CURVED FACE ONLY)



HOLE SIZE


Ø15mm

COUNTERBORE


(REQUIRED FOR FLUSH FINISH)
Ø16mm x 1.6mm (Curved Face)
Ø16mm x 0.5mm (Flat Face)

CONTROL


1-10V | DALI | DMX | ZIGBEE | CASAMBI
BLUE LIGHT LINK | basicDIM WIRELESS



Curved Face



Flat Face



Circular distribution measured at vertical down (0°) mounting

Ask Us.

Your success is important to us. Get in touch with your Planet LED Puck supplier today.

*Specifications are subject to change without notice.
†Test for LED emitter at 500 mA and below 55°C ambient temp.

DATASHEET


RGBW WIDE



PHOTOMETRICS

Lumens (4000K): 161lm
Beam Angle (FWHM): 105°

SYMMETRIC BEAM 3000K

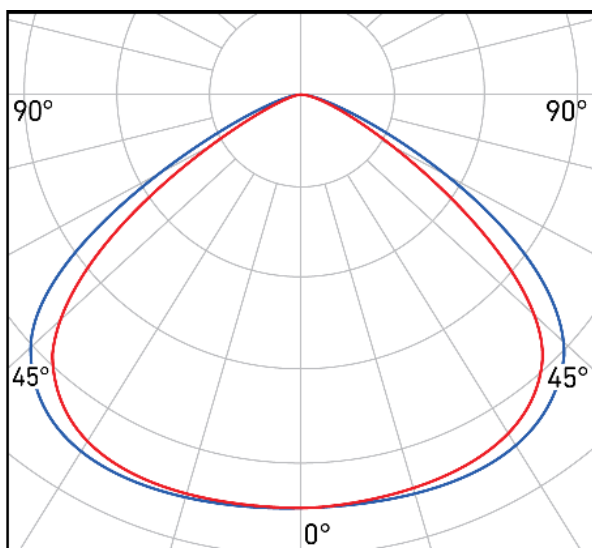

*Results displayed were obtained using
white chip at 500mA*

