



DATASHEET

PLANET **LED PUCK** **SNAP** **ASYMMETRIC**

Snap is the world-leading series of integrated LED modules for handrail. Designed for exceptional efficiency, durability and photometric performance. Compact and impact-resistant, Snap also features a patented collapsible shell design for a quick, snap-in install. The result is a secure and discreetly flush finish. It's versatile and elegant handrail lighting — in a snap.




PLANET
LIGHTING



SNAP ASYMMETRIC

5 years warranty is just the beginning. We design and manufacture entirely in our purpose built Australian facility. Snap is vandal resistant and impact rated to IK10, and each and every Snap mini puck is burned in to ensure the light you receive performs as it should.



SPECIFICATIONS*

TECHNICAL

1.4W / 500mA / 2.8Vf
3000K - 193lm / 4000K - 206lm
CRI 80+ (CRI 90+ OPTION)
3 STEP MACADAM ELLIPSE
L90 B10 >100,000h

OPTICS

POLYCARBONATE (STANDARD)
BOROSILICATE (OPTION)

DISTRIBUTION

ELLIPTICAL ASYMMETRIC

MATERIAL

316 STAINLESS STEEL
ELECTROPOLISHED

AMBIENT OPERATING CONDITIONS

min. -40° / max. 55°

PROTECTION CLASS

POLYCARBONATE IP65 / IK10
BOROSILICATE IP67 (OPTION)

ELECTRICAL

COOLSPICE CONNECTOR



INSTALLATION SURFACE

MIN. 1.5mm WALL THICKNESS
MIN. Ø35mm RAIL (CURVED FACE ONLY)

HOLE SIZE


Ø15mm

COUNTERBORE


(REQUIRED FOR FLUSH FINISH)
Ø16mm x 1.6mm (Curved Face)
Ø16mm x 0.5mm (Flat Face)

CONTROL


1-10V | DALI | DMX | ZIGBEE | CASAMBI
BLUE LIGHT LINK | basicDIM WIRELESS

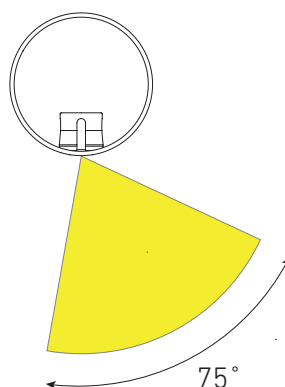

Elliptical asymmetric distribution displayed here with a vertical mount.




16mm




15mm

Curved Face



16mm



15mm

Flat Face

Ask Us.

Your success is important to us. Get in touch with your Planet LED Puck supplier today.

*Specifications are subject to change without notice.



†Test for LED emitter at 500 mA and below 55°C ambient temp.

DATASHEET

SNAP ASYMMETRIC





Snap Asymmetric has an elliptical asymmetric distribution. Designed for insertion at 0-10 degrees from the vertical axis of the handrail underside. The asymmetric beam illuminates the path but keeps the light source out of sight. Snap is available in a range of standard distributions and special angles on request.

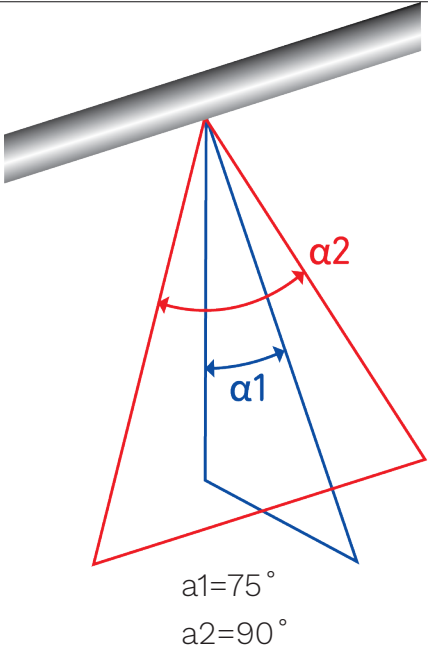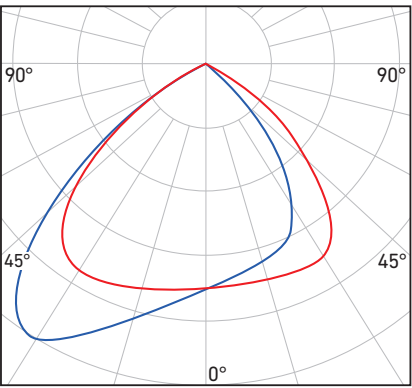

LUX GUIDE

The following guide is intended to help designers and engineers with desired lux levels. The drawing to the right shows a typical installation into a handrail. The tables list the average lux at a variety of path widths and LED spacings.

TYPICAL INSTALLATION

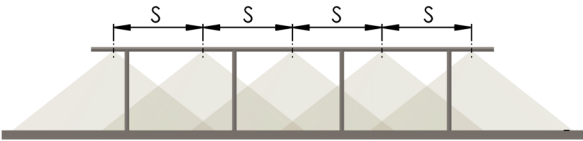

Height (H) is at 1m

ASYMMETRIC BEAM: LIGHT FROM BOTH


Path Width (W)	1.2m	2m	3m	4.0m
LED Spacing (S)	lx	lx	lx	lx
0.5m	356	232	148	112
1m	178	116	74	56
2m	89	58	37	28

lx = average lux
CCT = 3000K
Note: Calculations indicated are with LED module in vertical down position.

*Specifications are subject to change without notice.

*Specifications are subject to change without notice.

SNAP ASYMMETRIC CODE BUILDER

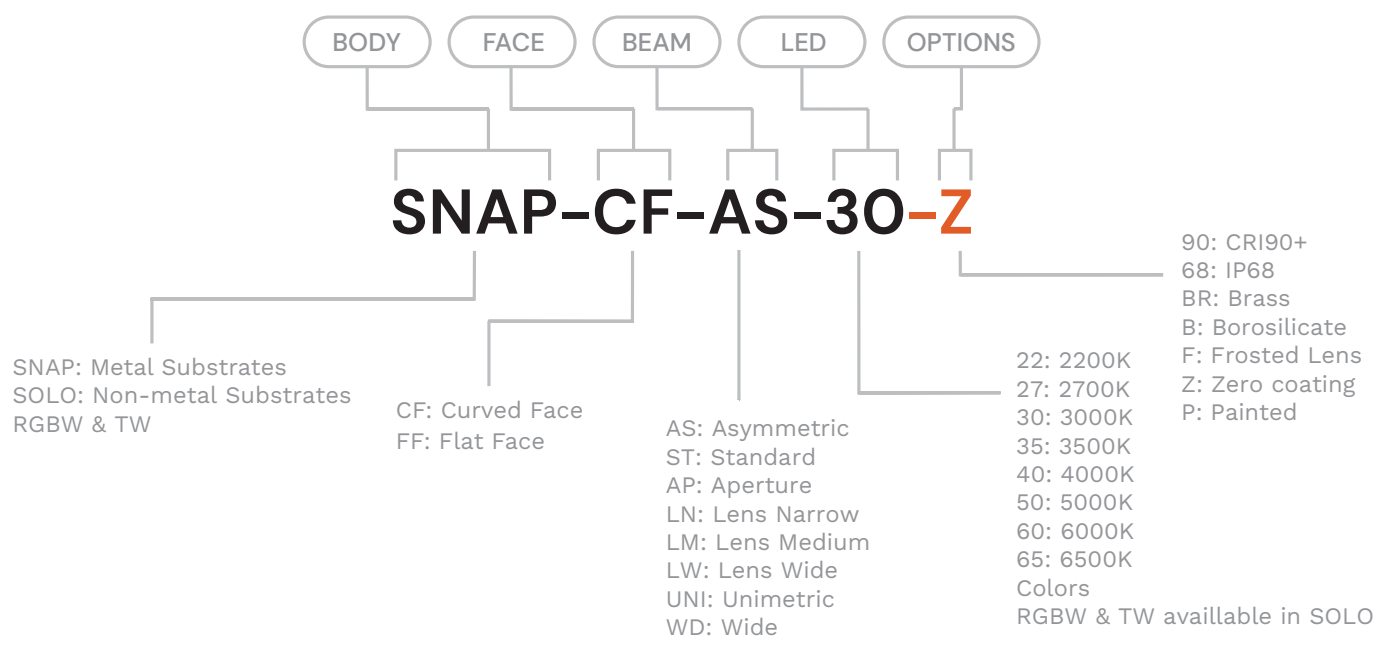

TYPICAL SPECIFICATIONS

Product Code	Specifications
SNAP-CF-AS-30	SNAP Curved Face Asymmetric Beam 3000K
SNAP-CF-AS-40	SNAP Curved Face Asymmetric Beam 4000K
SNAP-FF-AS-30	SNAP Flat Face Asymmetric Beam 3000K
SNAP-FF-AS-40	SNAP Flat Face Asymmetric Beam 4000K



*Specifications are subject to change without notice.